
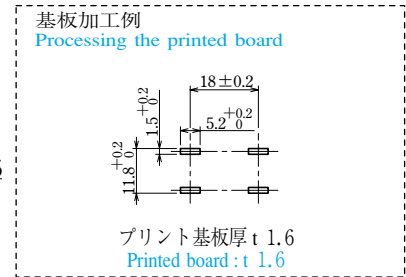


型名 Type Number	F4093D
定格 Rating	最大通電電流60A(2回路) Maximum current 60A(2 circuits) 片側 30A One side current 30A

一般公差/General Tolerance ±0.3

尺度/Scale 1/1 単位/Unit mm

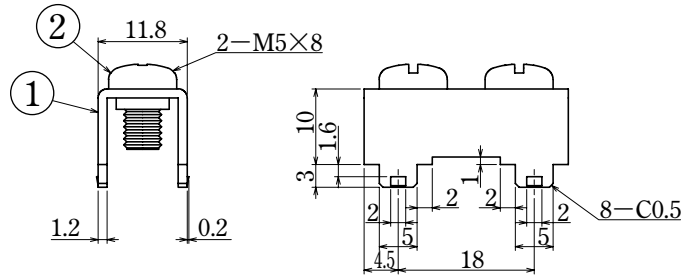


●注文方法：型番 (下表の型番を御参照下さい)

●Ordering Form : Type No. (See the type number in the following table)

■仕様/Specifications.

部番/Part No.	名称/Part Name	材質/Material	規格/Standard	寸法/Size	処理/Treatment
1	基板端子 Printed board terminal	黄銅 Brass	C2680R	板厚 t 1.2	スズメッキ Tin plating
2	結線ビス Screw	黄銅 Brass	C2700W		ニッケルメッキ Nickel-Plated


型番/Type No.	納入される物 / Product Delivered
F 4093D	基板端子 M5のみ (ビスなし) / Printed board terminal (for M5) only (w/o screws)
F 4093D S	基板端子+M5×8L バインドビス組付 / Printed board terminal+M5×8L binding head screw attached

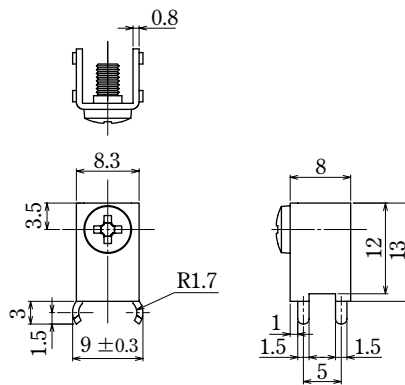

型名 Type Number	F4094
定格 Rating	15A

一般公差/General Tolerance ±0.5

尺度/Scale 1/1 単位/Unit mm

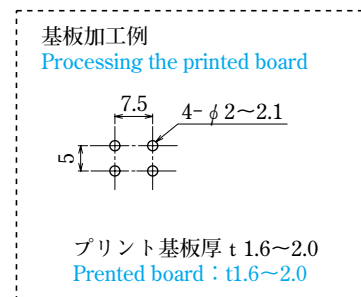

●注文方法：型番 (下表の型番を御参照下さい)

●Ordering Form : Type No. (See the type number in the following table)

■仕様/Specifications.

部番/Part No.	名称/Part Name	材質/Material	規格/Standard	寸法/Size	処理/Treatment
1	基板端子 Printed board terminal	黄銅 Brass	C2680R	板厚 t 0.8	スズメッキ Tin Plated
2	結線ビス Screw	黄銅 Brass	C2700W		ニッケルメッキ Nickel-Plated

型番/Type No.	納入される物 / Product Delivered
F 4094 A S	基板端子 M3のみ (ビスなし) / Printed board terminal (for M3) only (w/o screws)
F 4093 A S	基板端子+M3×6L バインドビス組付 / Printed board terminal+M3×6L binding head screw attached